

SPECIFICATIONS

Insulation Resistance:	1,000MΩ min.
Withstanding Voltage:	500V AC
Contact Resistance:	100mΩ max.
Current Rating:	0.5A max. per contact
Mating Cycles:	10,000 insertions


MATERIALS AND FINISH

Insulator:	PA-9T, (UL94V-0) and LCP
Contact :	Phoshor Bronze (P/P Bronze)
Contact Plating:	AU

FEATURES



- 6 pin SIM manual μSD push / push card reader
- Card detection and write protection switch
- RoHS2011/65/EU
- Easy operation
- Tape and Reel packaging

OUTLINE CONNECTOR DIMENSIONS

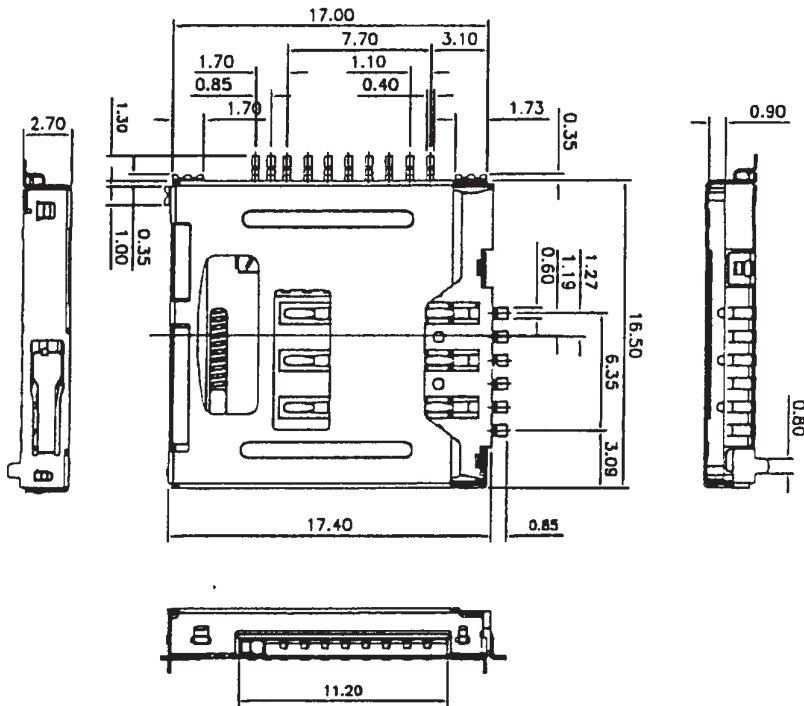


PART NUMBER

FR5016T - 2000 - OV3

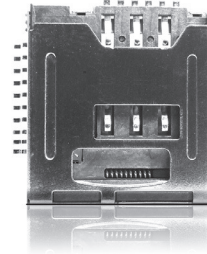

RECOMMENDED PCB LAYOUT

Edge of PCB

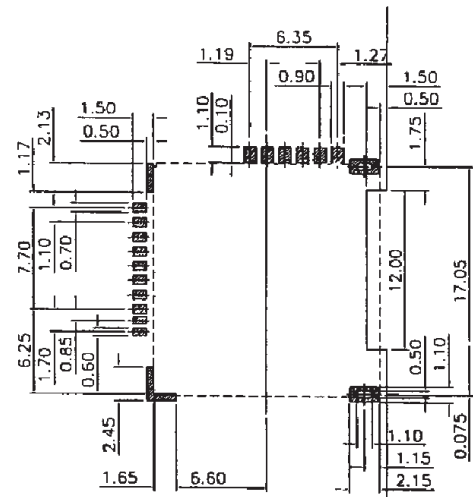

CARD INSERTION DETAILS

